


Battery-Free Wireless Dimming Kit

No wire | No battery | No hassle

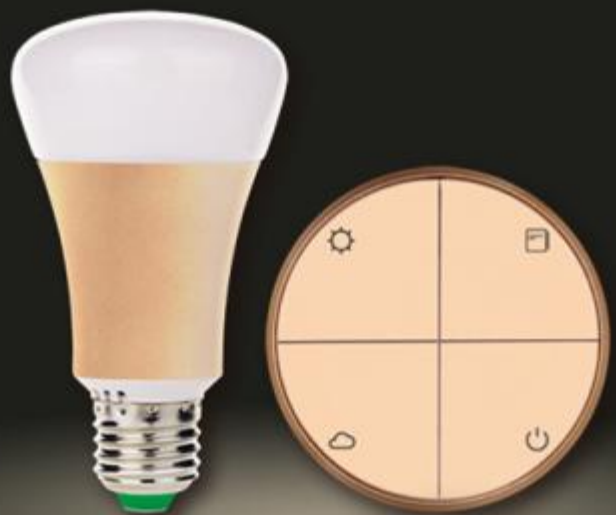

JP
PRODUCTION


No Wi-Fi

No Bluetooth

No APP

Dimmer Brightness

JP
PRODUCTION



**Adjust brightness
by touching**



Dimmer Color Temp.

JP
PRODUCTION



**Color Temperature
Adjustment**



WARM



NATURAL



COOL



ROMANTIC



RELAXED



BRIGHT

JP
PRODUCTION




Switch Scenes Freely

No Battery, How It Works?

Wireless data transfer via RF-technology.

The required RF-energy is created by the mechanical actuation of the switch. When press the switch, mechanical energy convert into electrical energy.

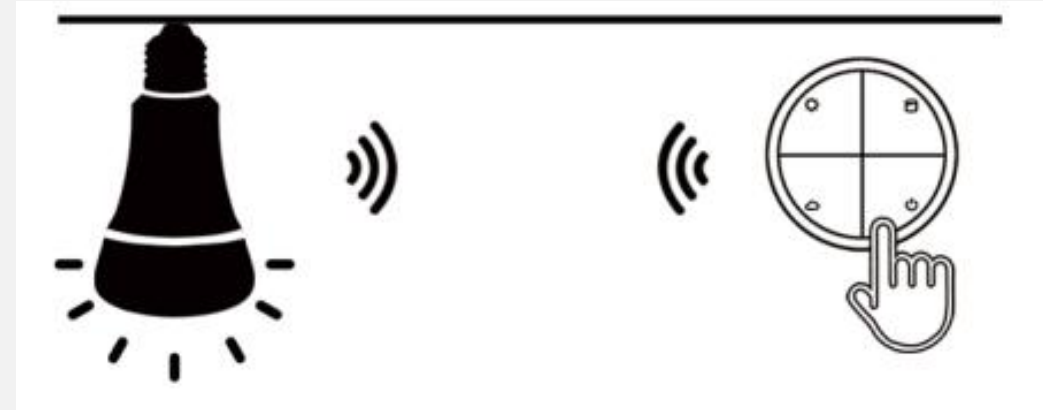


Input Voltage	AC 85~265V 50/60Hz
Power	8W
Luminous Flux	600
Remote Control Range	10~15meters
Bulb Type	LED
Bulb Interface	E27
Operating Temperature	-5℃ to +40℃
Lamp Life	25000 hours
Switch Life	20,0000 clicks
Scope of Use	Indoor use
Battery Required?	No

Embed the receiver into the LED bulb.



Benefits

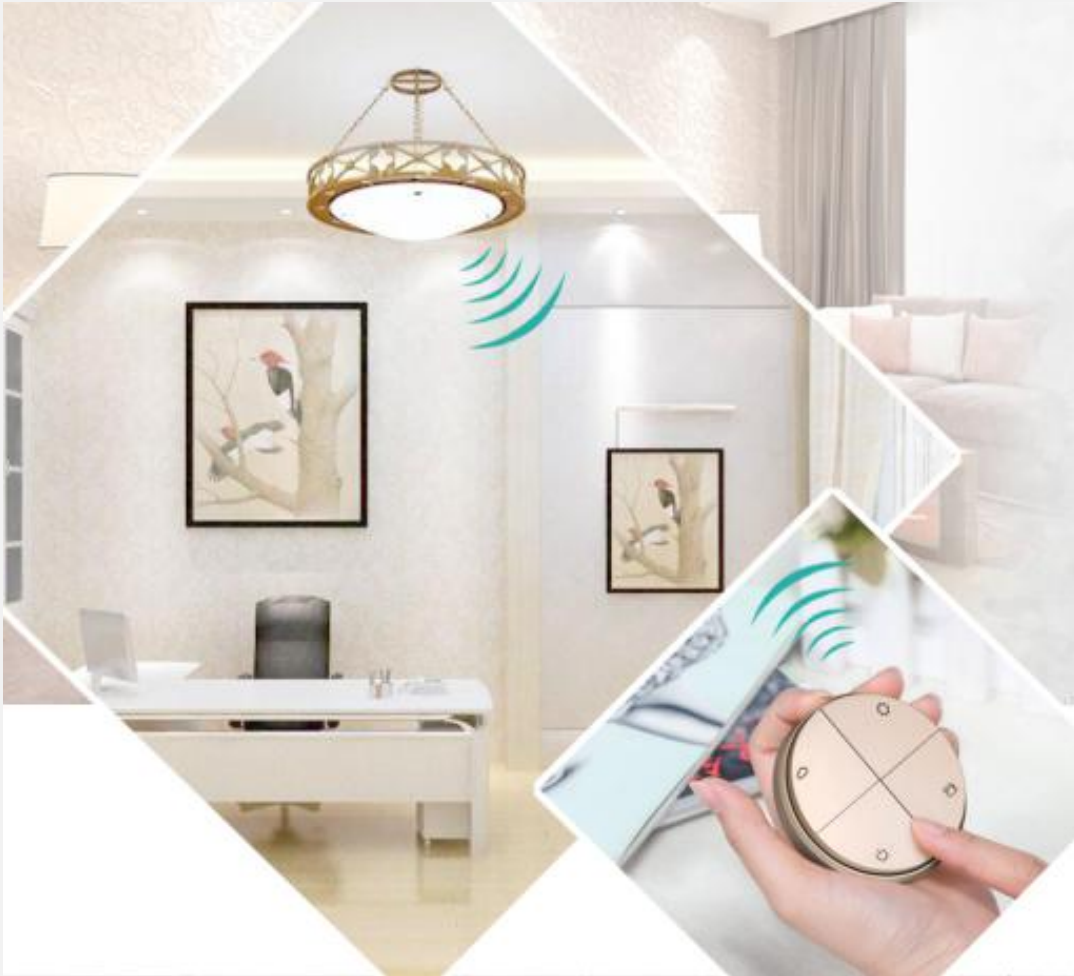



* Easy remote control within 15 meters, stable and reliable wireless signal can pass through the wall, non-interference.

* Under the same brightness, our LED Light bulb power consumption is only **20%** of incandescent lamp, **50%** of fluorescent lamp, really Energy Savings.

- * **Convenient, Easy using,**
- * **Energy-saving, Eco-friendly,**
- * **Maintenance-free**
- * **Flexible, Reliable**





Version 1

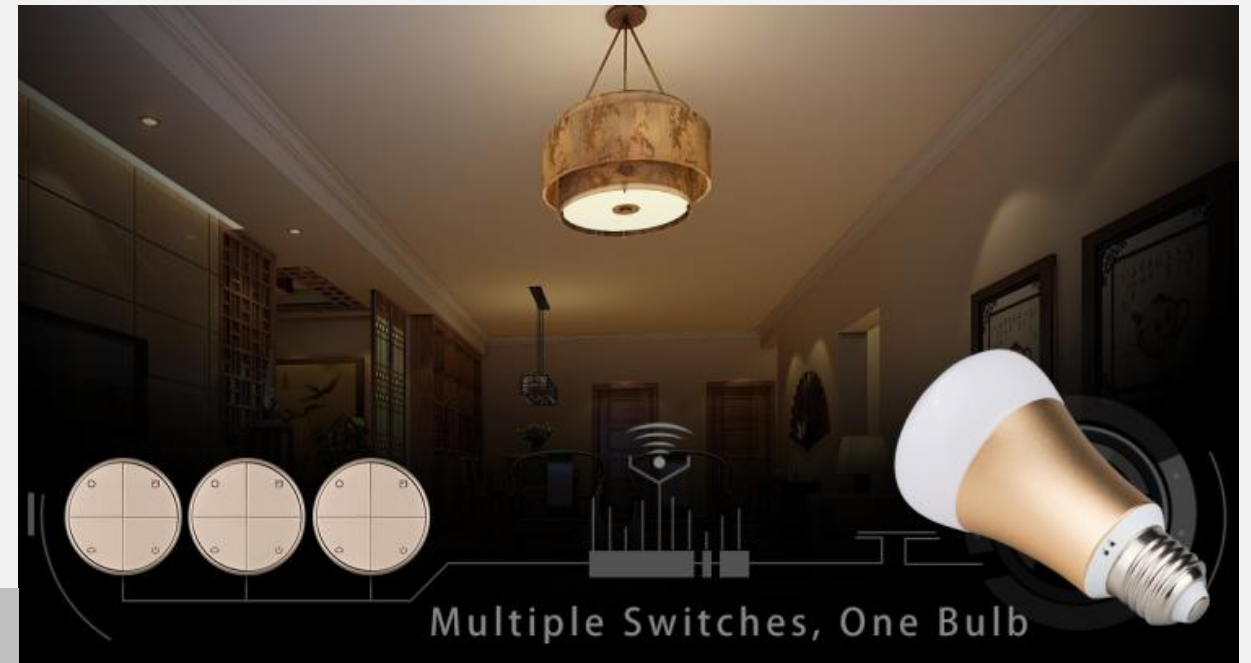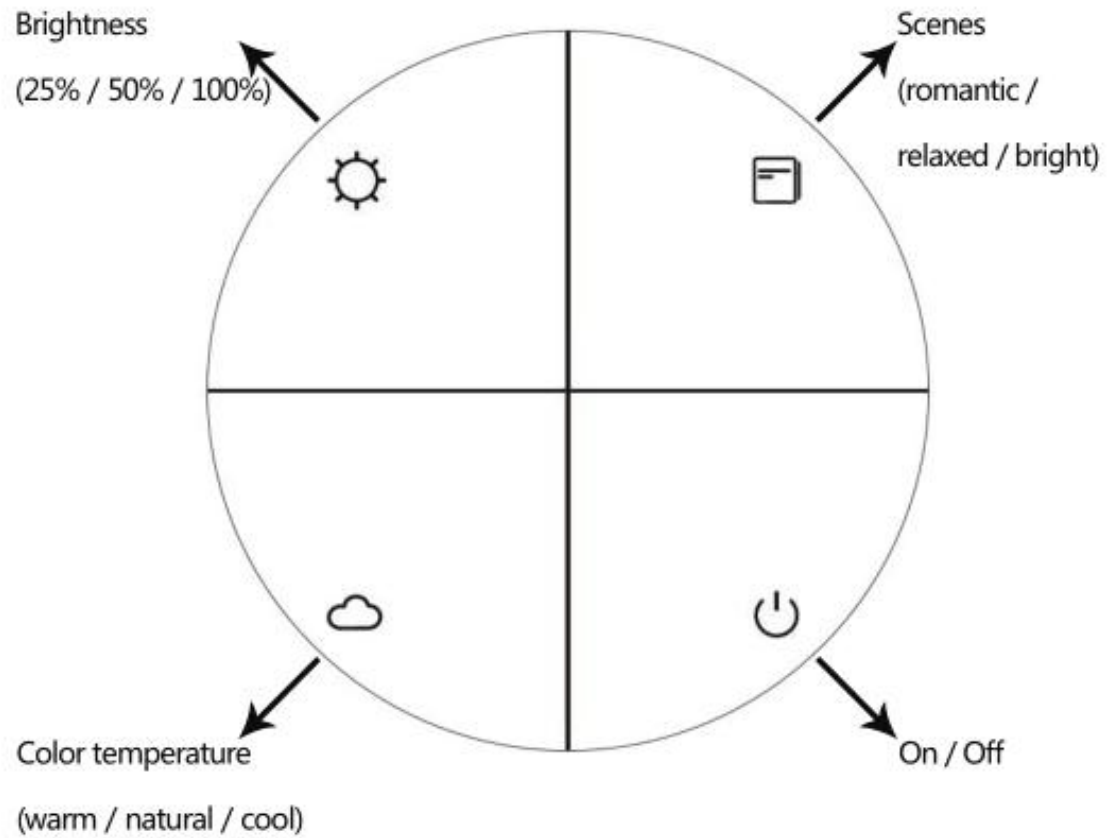

* Customize The Dimmer Switch 4 Button Function Available

Version 2 & Version 3

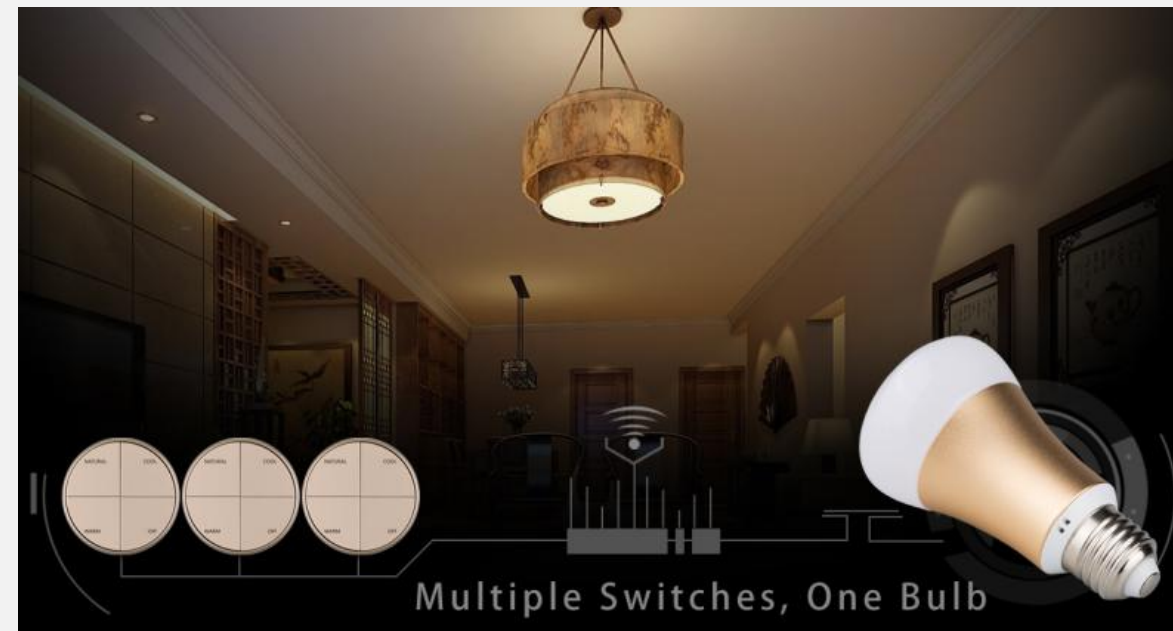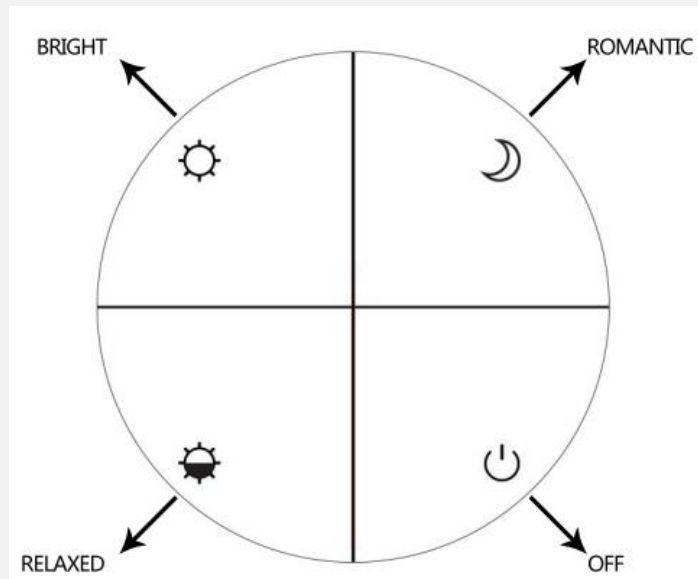

High transmittance anti-vertigo
lampshade (PMMA)

High Quality LED Bulb

270 angle light-emitting

High-quality LED lamp beads,
long life of 25,000 hours

Expensive aluminum lamp body,
Stronger heat dissipation, durable

No strobe light, more expensive
materials, only for the care of
your eyes

Anti-lightning, overheating
protection, overload protection

E27 Universal Interface, Easy to use

* The remote control switch is embedded with micro generator which can collect energy when press. No battery inside, based on 20 years.




Applications



Installation Guide

Step 1: Install the bulb into the lamp cap. / Step 2: Wait 3 seconds, then you can control the bulb by the switch directly.

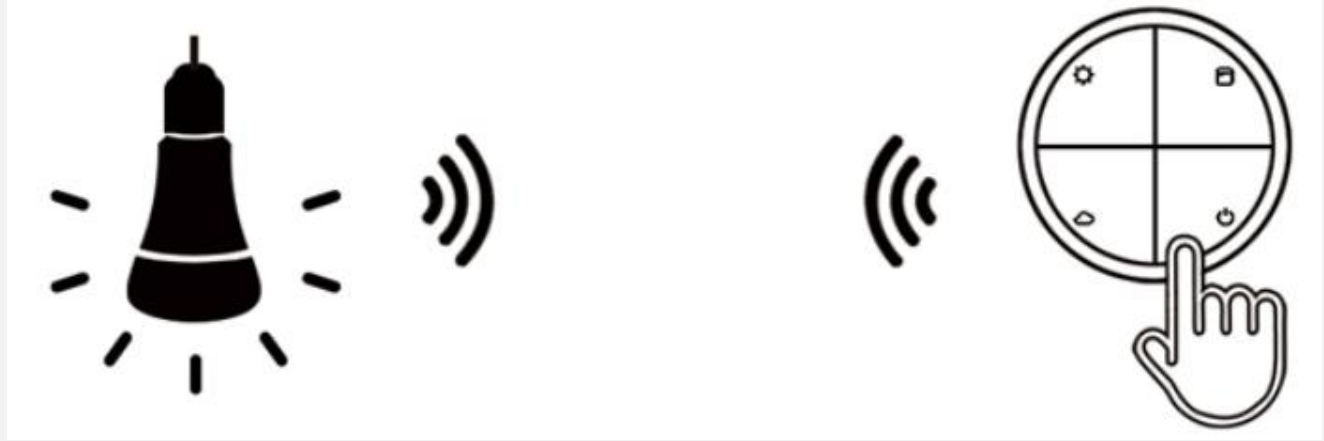

* Warm Tips

1. Please cut off the power during installation.
2. Do not use lamp with all-metal covers so as to avoid bad signal.
3. Do not use fully enclosed fixtures to avoid bad signal or heat.
4. Avoid to mount the switch on metal or thick walls which may make the remote distance shorter.
5. To get the best control distance, please make sure there is no barrier between a switch and a bulb in straight line.
6. Do not control bulb with other brand switch, otherwise it may damage the bulb.



How to Pair Code & Clear Code

* The switch and the bulb are paired up in factory, the user can use directly.

If reset, how to pair?

1. Power off the bulb and then power on after 3 seconds.
2. Within 3 seconds after power on, continuous press key of the remote control switch for **3 Times**.
3. The bulb flash slowly for **3 Times** paired successfully.

Remark:

1. If you need other switches to control the same bulb just repeat the above steps.
2. Ensure no other pairing within 100 meters to avoid interference.

How to clear code?

1. Power off the bulb and then power on after 3 seconds
2. Within 3 seconds after power on, continuous press key of the remote control switch for **5 Times**.
3. The bulb flash rapidly for **5 Times** indicates that it has been cleared successfully.

Remark: the code removal process will clear all code information of switches.

OEM Logo

All goods no logo on the products and packing .

Also can print or stick customers' logo on products and packing.

Certification





Connect your own Battery – Free Wireless Dimming Kit

= endless possibilities

You are kindly invited to start cooperation with us.

Please visit our web site: www.jpproduction.pl or contact our European distributor

JP Consulting

ul. Zielonej Laki 16, 05-092 Lomianki near Warsaw, Poland

Tel: +48 600 802 858, mail: jpconsulting@jpconsulting.pl

VAT ID: PL 113 – 060 – 57 – 65

www.jpconsulting.pl www.jptrade.pl www.buy-polish.com

UK & IRISH SALES OFFICE: Mr. Robert Moore, tel: 028 9443 2005,

ENGLAND & WHALES SALES OFFICE: Mr. Terry Haynes, tel: 07836 226406